


# HIGH-GRADE STEEL CLOCKS „V4a“



For operating theatre, canteen kitchen, labs, indoor swimming pools, ships  
 Disinfectant-proof, acid-proof, sea-waterproof  
 also as radio controlled clocks



**Tile built-in clock**  
 with built-in socket  
 Type 358 a (plant 10)  
 Type 358 b (plant 10)  
 Type 358 c (plant 10)  
 Type 358 d (plant 10)

Type 379E/879E  
 On the plaster or  
 double dialled


Type 120E/520E

Type 330E/830E

	<b>Tile built-in clock</b> 303x303 mm, IP 54 Type:	<b>On the plaster</b> Square, IP 54 Type:	<b>On the plaster</b> Round, IP 13 Type:	<b>On the plaster</b> Round, IP 54 Type:
<b>Single dial</b> Options - illumination - Radio-Controlled DCF 77	<b>358</b> ...F	<b>379E</b> ...tr ...F	<b>120E</b> ...F	<b>330E</b> ...tr ...F
<b>Double dial</b> Mounting: D/W Options: - illumination - Radio-Controlled DCF 77		<b>879E</b> ...tr ...F	<b>520E</b> ...F	<b>830E</b> ...tr ...F
<b>Diameter</b>	25x25 cm	40x40 cm 25x25 cm (single dial)	ϕ 25 cm (single dial) ϕ 30 cm ϕ 40cm	ϕ 40 cm

## Example how to order:

**879E W tr 40 13 10**

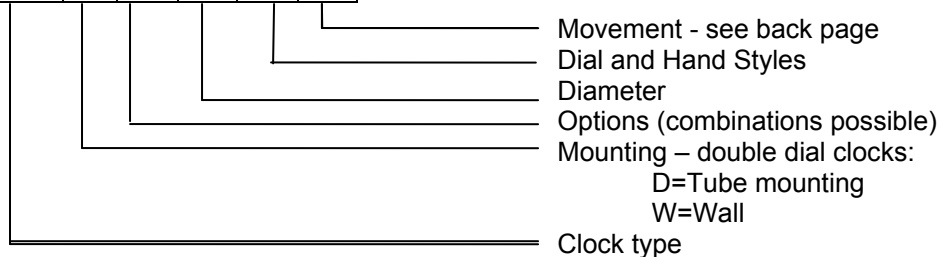

## Advantages – which are very important

- metal case from High-grade steel V4a
- completely resistant to disinfectant, acids, sea water
- surface stroke polished
- safety glass as option
- at request other dial and hand styles
- clear-cut needle- stable and very stylish
- best quality  
“Made in Germany”

*Perfect in quality!*

# HIGH-GRADE STEEL CLOCKS „V4a“

HIGH GRADE STEEL


rustproof

## Movements

- 10** - 24 V pol.\* (minute-impulse-movement)
- 11** - 24 V pol.\* forward moving second/forward moving minute
- 12** - 24 V pol.\* forward moving second/forward moving minute, **especially noiseless**
- 13** - 24 V pol.\* creep second 230 V/forward moving minute
- 14** - 24 V pol.\* forward moving second/forward moving minute
  
- 20** - 24 V SR 2\* (self-regulating 2 wires)
- 21** - 24 V SR 3\* (self-regulating 3 wires)
  
- 30** - Radio-controlled movement for batteries (duration 2 years)
- 32** - Radio-controlled movement for power supply 230 V
  
- 40** - Quartz-battery-movement
- 50** - Synchronous movement with seconds 230 V

\* If 12, 48 or 60 V is required – please mention on your order.  
If you do not mention anything we shall deliver 24 V pol. (10).

## Mounting

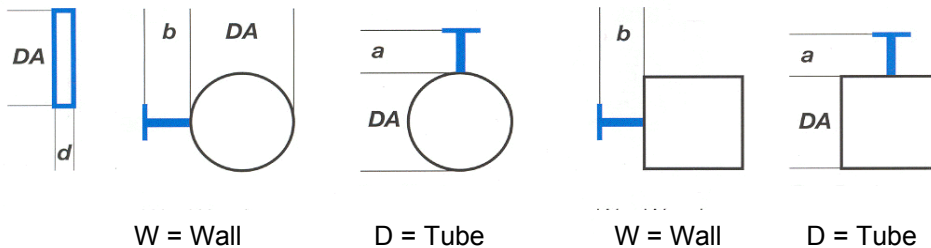

Dial size	∅ 250 mm	∅ 300 mm	∅ 400 mm
Type 358 DA	303	-	-
Type 120E DA d	280 58	340 58	424 58
Type 520E DA d a b	- - - -	340 130 500 100	424 130 500 100
Type 330E DA d	- -	- -	447 95
Type 379E DA d	303 72	- -	452 136
Type 830E DA d a b	- - - -	- - - -	447 190 500 200
Type 879E DA d a b	- - - -	- - - -	452 199 200 200

## Built-in socket Type 358

