



INDOOR CLOCKS „PROFI-3000-LINE“

Metal-housing, 3 times painted with protection glass

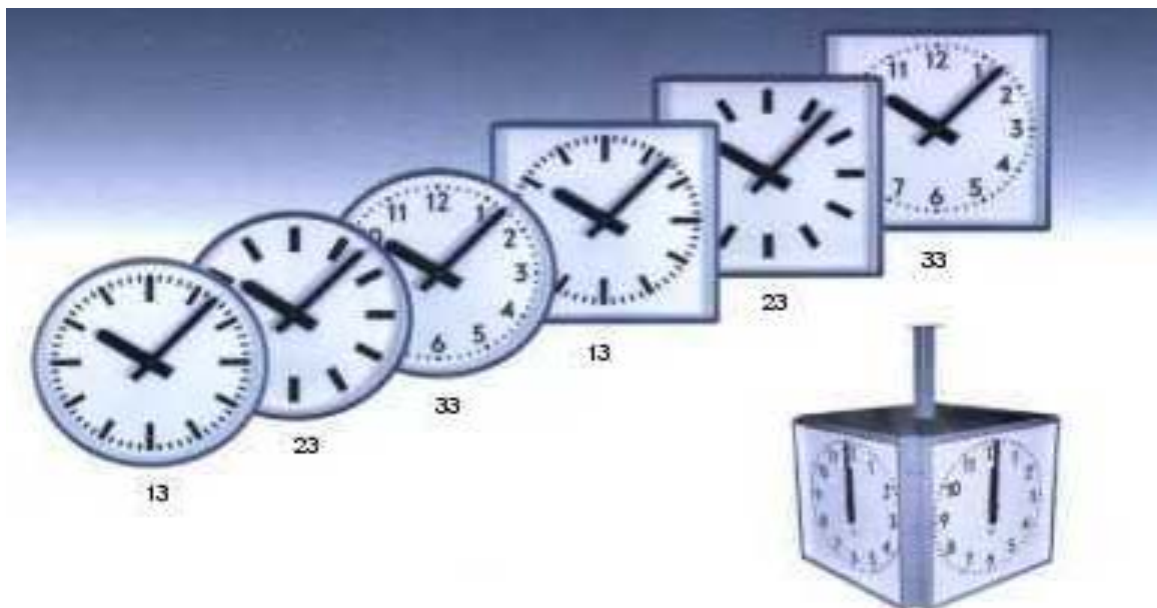

1. Protection glass flat Colour: silver grey	Round Type:	Square Type:
Single dial 25/30/40/50/60/80 cm Options - ball protection - wet room clock - radio-controlled DCF 77	120 ...B ...FE ... F	179 ...B ...FE ... F
Double dial 30/40/50/60/80cm Mounting: D/W Options: - wet room clock - radio-controlled DCF 77	520 ...FE ... F	520 ...FE ... F
Four faces clock 30/40/60 cm		479
2. Protection glass vaulted Colour: white		
Single dial 25/30/40 cm	151	
Double dial 30/40 cm Mounting: D/W/K	551	

Example how to order:

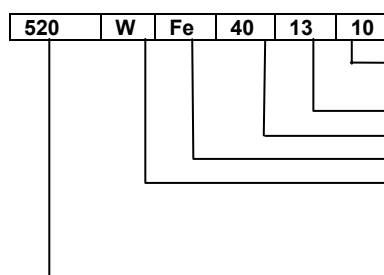

Movement - see back page
Dial and Hand Styles
Diameter
Options (combinations possible)
Mounting – double dial clocks:
D=Tube mounting
W=Wall
K=Chain
Clock type

Advantages – which are very important

- stable metal for high strain
- protection glass insensitive against aggressive air, acid, disinfectant
- very good quality – “Made in Germany”
- special lacquer possible
- at request other dial and hand styles
- clear-cut needle- stable and very stylish

Quality which decides!


INDOOR CLOCKS „PROFI-3000-LINE“

Movements

10 - 24 V pol.* (minute-impulse-movement)	up to 100 cm ϕ
11 - 24 V pol.* forward moving second/forward moving minute	up to 60 cm ϕ
12 - 24 V pol.* forward moving second/forward moving minute, especially noiseless	up to 60 cm ϕ
13 - 24 V pol.* creep second 230 V/forward moving minute	up to 80 cm ϕ
14 - 24 V pol.* forward moving second/forward moving minute	up to 60 cm ϕ
20 - 24 V SR 2* (self-regulating 2 wires)	up to 80 cm ϕ
21 - 24 V SR 3* (self-regulating 3 wires)	up to 80 cm ϕ
30 - Radio-controlled movement for batteries (duration 2 years)	up to 80 cm ϕ
31 - Radio-controlled movement with lithium cell (duration about 8 years)	up to 80 cm ϕ
32 - Radio-controlled movement for power supply 230 V	up to 80 cm ϕ
40 - Quartz-battery-movement	up to 40 cm ϕ
50 - Synchronous movement with seconds 230 V (Standard up to 50 cm ϕ)	up to 80 cm ϕ
51 - Synchronous movement without seconds 230 V	up to 80 cm ϕ

* If 12, 48 or 60 V is required – please mention on your order.
If you do not mention anything we shall deliver 24 V pol. (10).

Mounting

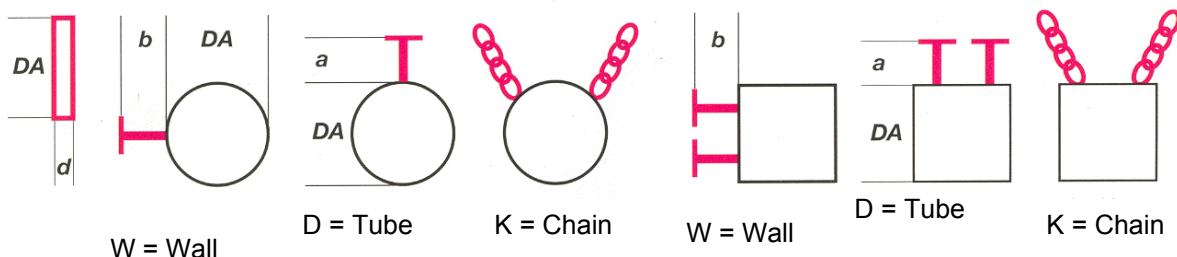

Dial size	ϕ 250 mm	ϕ 300 mm	ϕ 400 mm	ϕ 500 mm	ϕ 600 mm	ϕ 800 mm
Type 120						
DA	280	340	425	551	653	836
d	62	60	62	72	66/100	120
Type 151						
DA	280	340	425	-	-	-
d	48	48	48	-	-	-
Type 179						
DA	286	343	443	545	645	847
d	62	60	49	90	90	120
Type 479						
DA	-	389	510	-	710	-
d	-	250	250	-	300	-
Type 520						
DA	-	340	425	551	708	873
d	-	128	135	163	244	300
a	-	500	500	500	500	100
b	-	100	100	200	200	300
Type 551						
DA	-	340	425	-	-	-
d	-	100	100	-	-	-
a	-	500	500	-	-	-
b	-	100	100	-	-	-
Type 551						
DA	-	350	450	576	676	883
d	-	104	104	220	220	305
a	-	200	200	300	300	350
b	-	100	100	200	200	300