


**Attract
attention
any time!**

**With Z+M
time and
measuring
instruments**

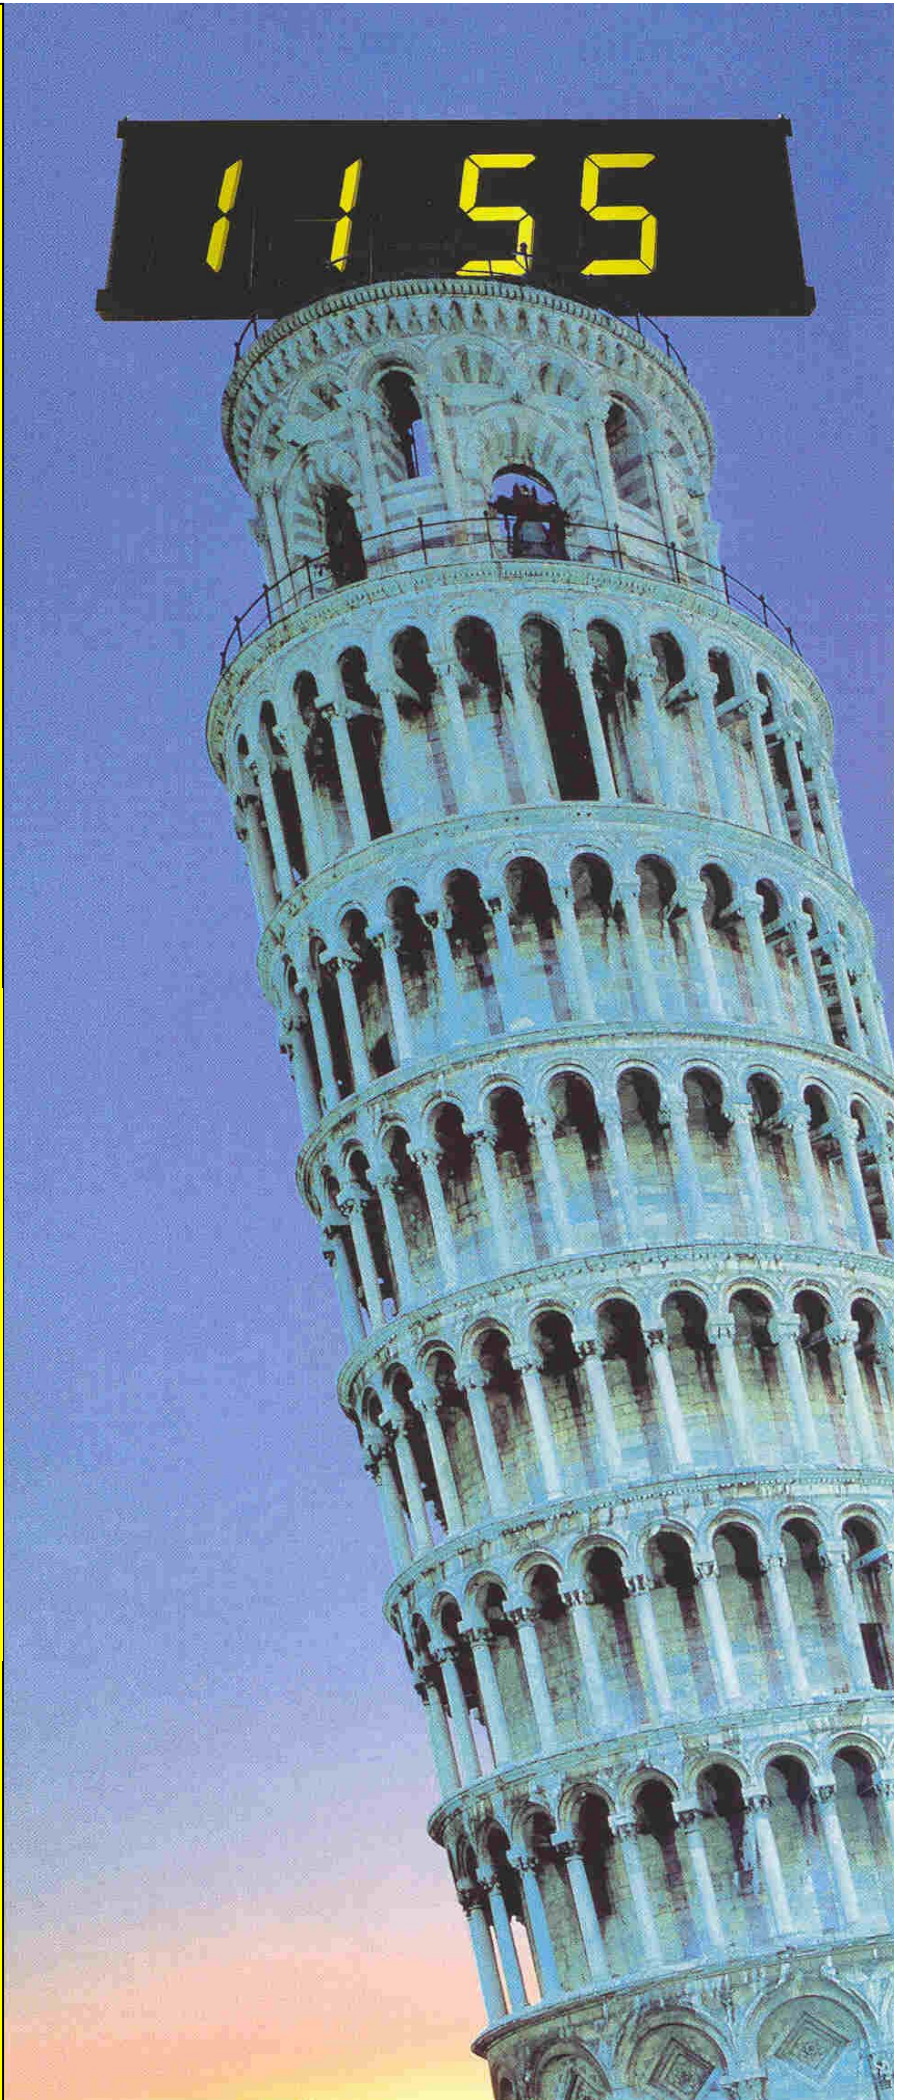

Any time, at any place an eye catcher.

Immense. Always informative. Signal yellow figures present alternately the exact time and exact temperature.


The best advertisement is to draw the attention to your company. But take care, all eyes are concentrated on your company.

The Z + M time and measuring instrument will be supplied in standards with 15,25 and 45 cm figure height, single dial, double dial in case or as construction set for the installation behind screens.

All as you want.



Remarkable at banks, companies, in bathrooms, stadiums, advertising spaces...

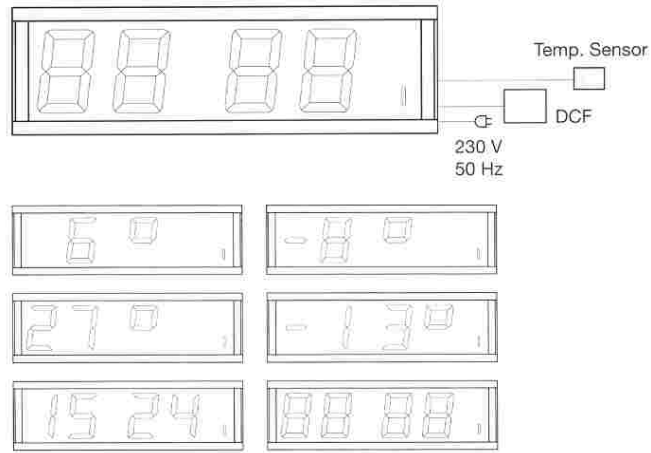

Typical Z + M: Intelligent technology, absolute uncomplicated.

- Electronic system: Very modern μ P-technology with watchdog supervision
- Time basis: DCF (radio-controlled clock) or/and Real Time Clock with lithium battery
- Change of the indication: The indication of time and temperature will change in the rhythm of 5 sec. (available until 30 sec.)
- Indication elements: Bi-stable seven-segments-indication yellow on black basis, less power consumption, best readable, very high safety in operation.
- Case: sheet steel lacquered with plexi-pane for the outdoor installation
- Work temperature: -25 until 50° C
- Ready for operation system, consists of:
 Scoreboard four-digit
 Power supply
 Temperature sensor
 DCF (radio-controlled clock)

Case of aluminium, plastic-laminated (black) with plexi-glass pane for outdoor installation

Type single dial	Type double dial	Figure height (mm)	Length (mm)	Height (mm)	Depth single dial/double dial
TT15e	TT15d	150	905	290	100/200
TT25e	TT25d	250	1310	394	100/200
TT45e	TT45d	450	1870	867	130/240

Construction set for the installation (figure modules and electronics according to the opposite illustration fix installed on aluminium-chassis)

Type single dial	Type double dial	Figure height (mm)	Length (mm)	Height (mm)	Depth single dial/double dial
BTT15e	BTT15d	150	834	222	100/200
BTT25e	BTT25d	250	1209	326	100/200
BTT45e	BTT45d	450	1975	557	130/240

* Reading distance according to DIN 1450 in meter
 Examples for order: TT25e = figure height 25 cm, single dialled, standard case
 BTT15d = figure height 15 cm, double dialled, installation set

